

Amp.	Poles	pack. unit	110V~	230V~	400V~	500V~	>50-500V~	>50-500V~
			50/60Hz 4h	50/60Hz 3p=6h 4p+5p=9h	50/60Hz 3p=9h 4p+5p=6h	50/60Hz 7h	100-300Hz 10h	301-500Hz 2h
			Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.
with flange 100 x 112								
63	3	2	433-4	433-6	433-9	433-7	433-10	433-2
63	4	2	434-4	434-9	434-6	434-7	434-10	434-2
63	5	2	435-4	435-9	435-6	435-7	435-10	435-2
with flange 100 x 107								
63	3	2	433-4fc	433-6fc	433-9fc	433-7fc	433-10fc	433-2fc
63	4	2	434-4fc	434-9fc	434-6fc	434-7fc	434-10fc	434-2fc
63	5	2	435-4fc	435-9fc	435-6fc	435-7fc	435-10fc	435-2fc
with flange 106 x 110								
63	3	2	433-4fd	433-6fd	433-9fd	433-7fd	433-10fd	433-2fd
63	4	2	434-4fd	434-9fd	434-6fd	434-7fd	434-10fd	434-2fd
63	5	2	435-4fd	435-9fd	435-6fd	435-7fd	435-10fd	435-2fd



435-6





„Power Twist“ Flanged socket sloping

Poles	63 Amp			63 Amp			63 Amp		
	3	4	5	3	4	5	3	4	5
a	100	100	100	100	100	100	106	106	106
b	112	112	112	107	107	107	110	110	110
c	80	80	80	77	77	77	90	90	90
d	88	88	88	85	85	85	90	90	90
e	64	64	64	64	64	64	64	64	64
f	80	80	80	80	80	80	80	80	80
g	92	92	92	92	92	92	92	92	92
h	82	82	82	82	82	82	82	82	82
i	7	7	7	7	7	7	7	7	7
j	148	148	148	148	148	148	148	148	148
k	154	154	154	154	154	154	154	154	154
Kind of connection: Contact frame with screws									
Wire flexible [mm ²]: 6-16									
solid [mm ²]: 6-25									
Contact screws [Ncm]: 200 Ncm									
Weight [g]: 495 540 595 491 536 591 498 443 598									

- contact frame with screws
- housing material: PA6
- contacts: brass with lamellar contact CuBe
- to order with pilot contact please add a „5“ e.g. 4355-6 (see page 9)
- to order with pilot contact system (PCS) please add a „6“ e.g. 4356-6 (see page 10)

IP66/67 watertight
IP44 on request

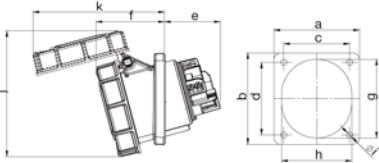

Amp.	Poles	pack. unit	110V~	230V~	400V~	500V~	>50-500V~	>50-500V~
			50/60Hz 4h	50/60Hz 3p=6h 4p+5p=9h	50/60Hz 3p=9h 4p+5p=6h	50/60Hz 7h	100-300Hz 10h	301-500Hz 2h
			Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.
with flange 120 x 130								
125	3	2	443-4	443-6	443-9	443-7	443-10	443-2
125	4	2	444-4	444-9	444-6	444-7	444-10	444-2
125	5	2	445-4	445-9	445-6	445-7	445-10	445-2
with flange 114 x 114								
125	3	2	443-4fe	443-6fe	443-9fe	443-7fe	443-10fe	443-2fe
125	4	2	444-4fe	444-9fe	444-6fe	444-7fe	444-10fe	444-2fe
125	5	2	445-4fe	445-9fe	445-6fe	445-7fe	445-10fe	445-2fe



445-6



„Power Twist“ Flanged socket sloping

Poles	125 Amp			125 Amp		
	3	4	5	3	4	5
a	120	120	120	114	114	114
b	130	130	130	114	114	114
c	100	100	100	90	90	90
d	108	108	108	90	90	90
e	92	92	92	92	92	92
f	77	77	77	77	77	77
g	102	102	102	102	102	102
h	90	90	90	90	90	90
i	7	7	7	7	7	7
j	160	160	160	160	160	160
k	162	162	162	162	162	162
Kind of connection: Contact frame with screws						
Wire flexible [mm ²]: 16-50						
solid [mm ²]: 16-70						
Contact screws [Ncm]: 450 Ncm						
Weight [g]: 804 896 995 792 880 987						

- contact frame with screws
- housing material: PA6
- contacts: brass with lamellar contact CuBe
- to order with pilot contact please add a „5“ e.g. 4455-6 (see page 9)
- to order with pilot contact system (PCS) please add a „6“ e.g. 4456-6 (see page 10)

IP66/67 watertight

