


Amp.	Poles	pack. unit	110V~	230V~	400V~	500V~	>50-500V~	>50-500V~
			50/60Hz 4h	50/60Hz 3p=6h 4p+5p=9h	50/60Hz 3p=9h 4p+5p=6h	50/60Hz 7h	100-300Hz 10h	301-500Hz 2h
			Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.
63	3	2	233-4	<b>233-6</b>	233-9	233-7	233-10	233-2
63	4	2	234-4	234-9	<b>234-6</b>	234-7	234-10	234-2
63	5	2	235-4	235-9	<b>235-6</b>	235-7	235-10	235-2



235-6

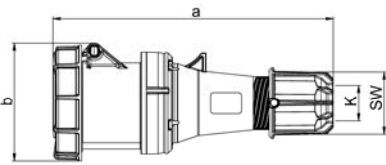

## „Power Twist“ Connector

	63 Amp		
Pole	3	4	5
a	269	269	269
b	114	114	114
K_cable Ø [mm]	14,5-36	14,5-36	14,5-36
Kind of connection:	Contact frame with screws		
Wire flexible [mm <sup>2</sup> ]	6-16		
Contact screws [Ncm]	200 Ncm		
SW	61	61	61
Weight [g]	669	710	768


- contact frame with screws
- housing material: PA6
- contacts: brass with lamellar contact CuBe
- to order with pilot contact please add a „5“ e.g. 2335-6 (see page 9)
- to order with pilot contact system (PCS) please add a „6“ e.g. 2336-6 (see page 10)

IP66/67 watertight

Amp.	Poles	pack. unit	110V~	230V~	400V~	500V~	>50-500V~	>50-500V~
			50/60Hz 4h	50/60Hz 3p=6h 4p+5p=9h	50/60Hz 3p=9h 4p+5p=6h	50/60Hz 7h	100-300Hz 10h	301-500Hz 2h
			Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.
125	3	2	243-4	<b>243-6</b>	243-9	243-7	243-10	243-2
125	4	2	244-4	244-9	<b>244-6</b>	244-7	244-10	244-2
125	5	2	245-4	245-9	<b>245-6</b>	245-7	245-10	245-2



245-6

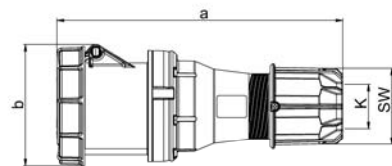

## „Power Twist“ Connector

	125 Amp		
Pole	3	4	5
a	287	287	287
b	124	124	124
K_cable Ø [mm]	22,5-50	22,5-50	22,5-50
Kind of connection:	Contact frame with screws		
Wire flexible [mm <sup>2</sup> ]	16-50		
Contact screws [Ncm]	450 Ncm		
SW	81	81	81
Weight [g]	1060	1167	1266

- contact frame with screws
- housing material: PA6
- contacts: brass with lamellar contact CuBe
- to order with pilot contact please add a „5“ e.g. 2435-6 (see page 9)
- to order with pilot contact system (PCS) please add a „6“ e.g. 2436-6 (see page 10)

IP66/67 watertight