


❖ FEATURE

- Material BMC (Bough Moulding Compound)
- **Insert** Brass Copper
- Rated Voltage 750VAC
- **Voltage withstand (50Hz/ 1min.)** from 6KV up to 25KV
- Operating temperature from -40°C up to + 140°C
- **Colour** Red RAL 3002

*\*Other technical specifications, on request*


❖ ORDERING CODE

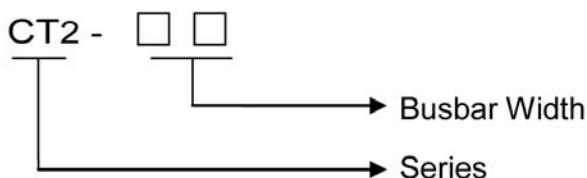




❖ DIMENSION


■ CT2-15  
(2P)

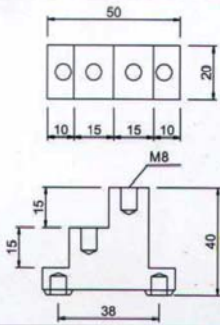



■ CT2-40  
(4P)

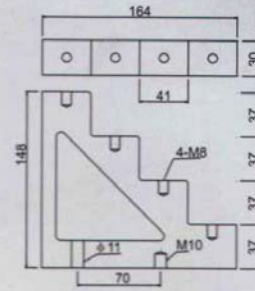

■ CT2-20  
(4P)

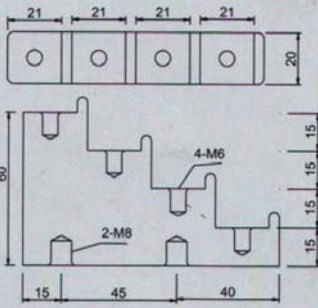

■ CT2-50  
(4P)

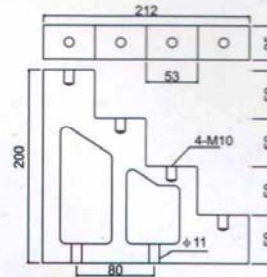

■ CT2-30  
(4P)

